



Saab 9-3 1998-2003

Saab 9-5 1998-2005

## INSTALLATION MANUAL

## Step 1:

Make sure the car is turned off and parked in a safe place.

Step 2: Set the stereo keys in directions as shown below.

Step 3: Gently pull out the stereo, be careful so that nothing breaks.



Step 4: Remove the ac-panel by gently pulling it loose with a screwdriver.



Step 5: Remove the existing buttons.




Step 6: Install the new supplied button with the AUX jack.



This connector should be assembled after the assembly of the button.

connector be connected.

Here should the stereos orginal

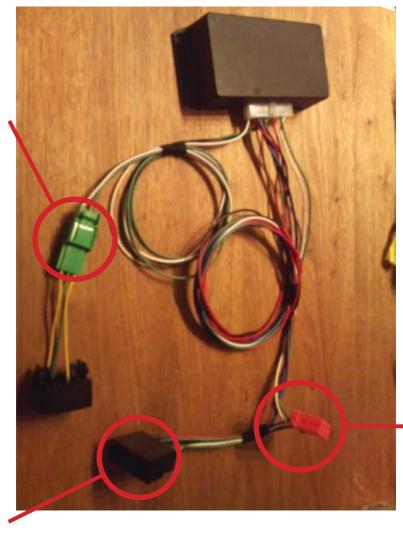

To be connected to the stereo

Step 8: Connect the contacts between the stereo connectors as shown below.



Step 9: Now the device needs to be energized, this is done through the brakeout adapter for the 12 volt outlet included in the kit. By putting adaptor between the cigarette lighter socket and its connectors.

## Step 10:

Hide the unit behind the panels where there is space and where it may be fixed still and not jump around when you are driving. Assemble the AC-panel and headunit.




## Troubleshooting

Problem	Solution
The unit is not work- ing	Ensure that you have the key in igtion postion, check wiring and fuse to lighter socket.
Stereo is not working as previous.	Check the green and white wires for damage.
Bad sound	Check that the cable is not damaged and that the contacts are connected properly.
Cables damaged	Contact support to get it repaired.

If you are unsure, discuss the problems with your retailer or our support team. We assume no responsibility whatsoever for damages or problems caused by improper installation of CD-Connect.

Should you still have problems, contact your dealer or email support@rindustri.se

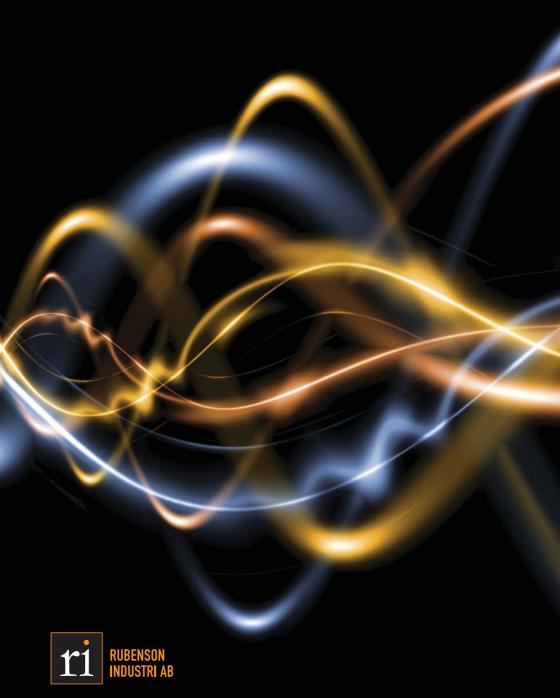

Knarrhögsgatan 6B, 431 60 Mölndal, Sweden. Office + 46 31-7880825, mobile +46 709 99 87 25. www.rindustri.se